
Anwendung/Application :



Operating System (OS): Geprüft/Approved: Verpackung/Packing:





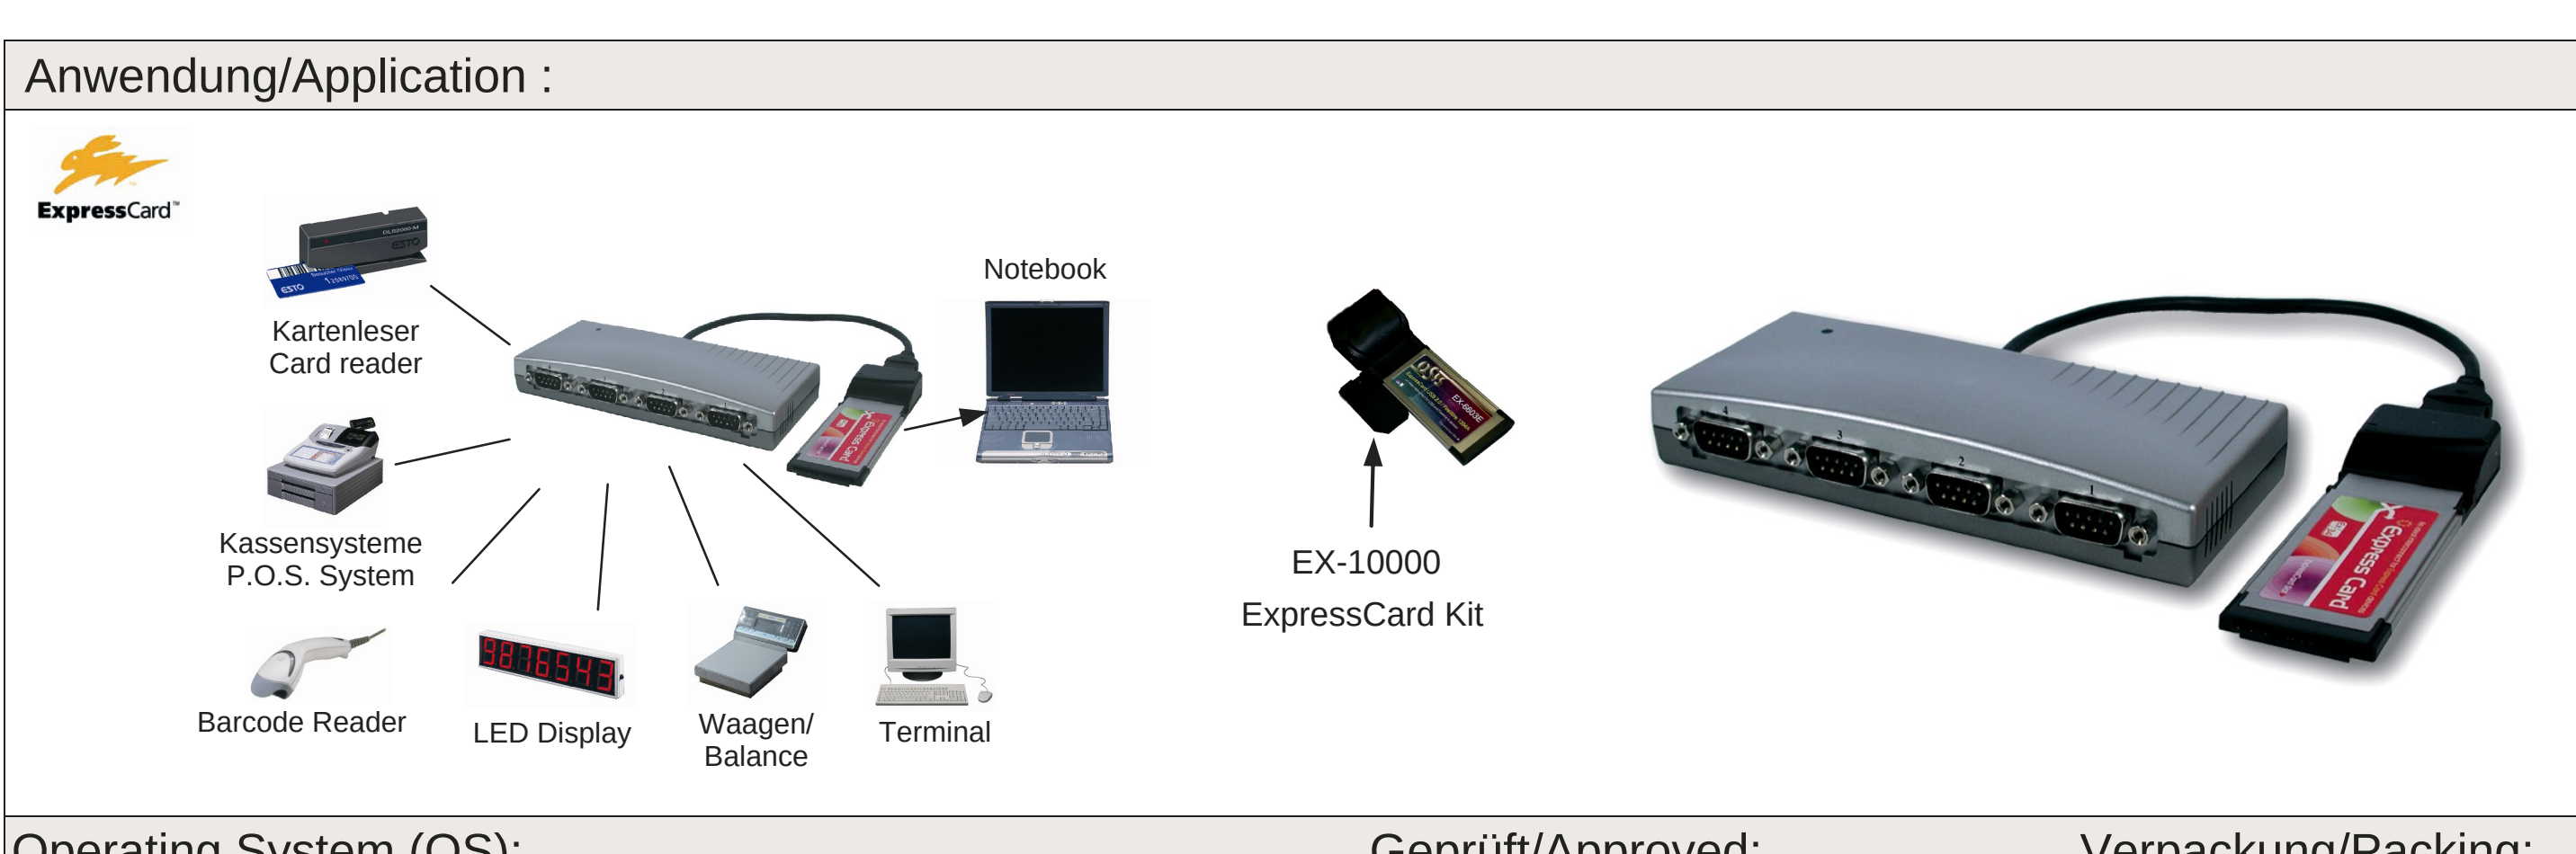











4S Serielle RS-232 ExpressCard Karte

Beschreibung :	• Die ExpressCard I/O Karte stellt 4 Serielle RS-232 High Performance UART 16C950 Ausgänge zur Verfügung. Er ist entwickelt worden um einen weiteren Serielle Ausgang für Notebook über den ExpressCard Bus zu erweitern um Serielle RS-232 Peripheriegeräte wie z.B. Modem, Kassendrucker usw. anzuschließen. Mit der EX-1374 wird ein ExpressCard Kit 34/54mm (EX-10000) mitgeliefert der die ExpressCard seitlich in einem 54mm Slot stabilisiert.
Merkmale :	• Schnittstelle: RS-232 V.24 • FIFO Buffer: 16C950 mit 128Byte • I/O Adressen: wird vom Betriebs System vergeben • Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing • Daten Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: none, even, odd, space, mark • Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND • ExpressCard Interface: ExpressCard Standard, Release 1.0
Chip-Set :	• Oxford OXCF950
Datenübertragung :	• 50Baud bis 921.6KBaud
Anschlüsse :	• 4 x 9 Pin D-SUB Seriell Stecker
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 55°C • 5 bis 95%
Hardwaresysteme :	• ExpressCard Slot
Abmessung / Gewicht :	• 150 x 70 x 30 mm / 400g
Lieferumfang :	• EX-1374, ExpressCard Kit, Treiber CD, Handbuch

4S Serial RS-232 ExpressCard

Description:	• The ExpressCard I/O adapter provides 4 high performance 16C950-type UART compatible RS-232 serial ports. It is designed for Notebook to provide instant COM port expansion via the ExpressCard Bus. The card is fully PCI Express Plug-and-Play compatible and no IRQ and I/O address conflict problems. With the EX-1374 it's included a ExpressCard Kit 34/54mm (EX-10000) what give the ExpressCard a lateral stability.
Feature :	• Interface: RS-232 V.24 • FIFO Buffer: 16C950 with128Byte • I/O addresses: Setting from the operating system • Interrupt: Setting from the System BIOS with Interrupt Sharing • ExpressCard Interface: Fully ExpressCard Standard, Release 1.0 • Data Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: None, even, odd, space, mark • Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Chip-Set :	• Oxford OXCF950
Data transfer eS-ATA 2 :	• 50Baud to 921.6KBaud
Connectors eS-ATA 2 :	• 4 x 9 pin D-SUB male serial connector
Operating Temperature : Operating Humidity :	• 0 to 55°C • 5 to 95%
Hardware system :	• ExpressCard Slot
Size / Weight :	• 150 x 70 x 30 mm / 400g
Packaging contents :	• EX-1374, ExpressCard Kit EX-10000, Driver CD, Manual